


Model LD 76 Rotary mixer

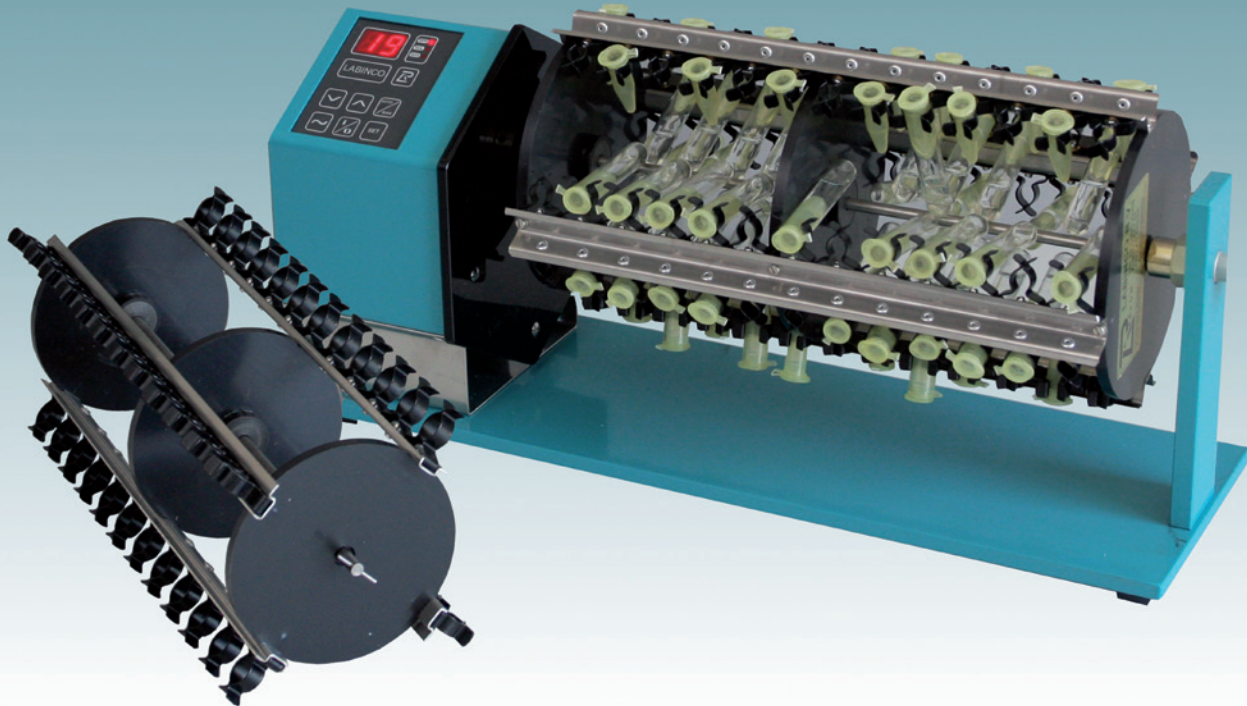


- Provides serial rotation of tubes and mini-tubes for extraction, diffusion, etc.
- Mixing action may be set by speed control 5-50 rpm
- Tube-diameter-range 4-32 mm
- Quick/easy coupling/exchange of rotation drum/bars
- Dual or triple disk support may be carried out
- Tubes may be exchanged while the rotator is running
- Dimensions: 490 x 160 x 205 mm
- Weight 4,5 kg

50/60 Hz Cat.No.: 76000 (230V) / 76010 (115V)

Electronically controlled stepper-motor provides:

- Digital read-out for - speed 5-50 rpm
- time 0-99 hrs/1-59 min
- Electronic times for "auto-stop"
- "Memory-function" for repeated operation
- "Re-start-function" for continued operation after line-voltage failure including auto-stop
- "Settings saving" available

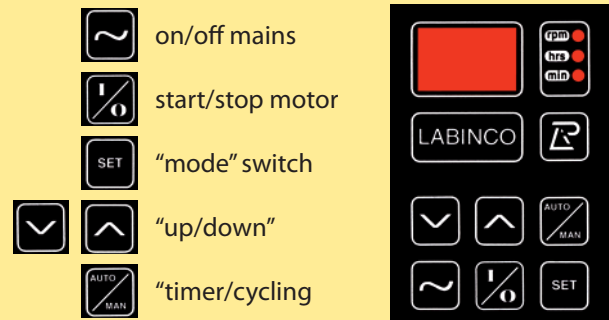

Accessories for rotary-mixers				
Bar/Drum outfit	tube \varnothing range mm	cat.no. for L26 and LD-76	max.tube length mm	max no. tubes
	16-20	26020	190	20
	19-22	26022	185	18
	22-27	26027	180	18
	4-6	26036	85	104
	6-9	26039	85	104
	9-12	26040	85	104
	12-16	26480	120	48
	if 2 rows used		140	24
	9-12	26560	120	56
	if 2 rows used		140	28



LABINCO B.V.

P.O. BOX 3259 - 4800 DG Breda, The Netherlands

Zinkstraat 64 - 4823 AC Breda, The Netherlands

Tel.: 0031(0)76 - 5417582, Fax: 0031(0)76 - 5420173

E-mail: info@labinco-bv.com - Internet: www.labinco-bv.com