

Boekel Minifridge II

Models 260009 and 260009-2

Features:

- Temperature range 18°C below ambient
- Maintains 14 °C temperature used in ligation reactions or 17°C for storing oocytes
- "Press to Set" microprocessor controller
- Well is watertight; functions as a small refrigerated bath
- Accommodates small beakers, flasks or up to 3 standard microplates when stacked
- Excellent alternative to messy ice buckets and water baths, which can be a source of contamination
- Useful for cooling blood samples prior to coagulation




Supplied With:

- Domed plastic lid
- Block Extractor

	Model 260009 (115 VAC)	Model 260009-2 (230 VAC)
Temperature Range	18°C below ambient	
Accuracy	+/- 1° C of set point	
Number of Blocks Held	2	
Overall Dimensions (Width x Length x Height)	24.8 cm x 28.6 cm x 18.4 cm (9.75 in x 11.75 in x 7.25 in)	
Well Dimensions (Width x Length x Height)	15.4 cm x 9.7 cm x 5.7 cm (6.25 in x 3.75 in x 2.25 in)	
Shipping Weight	6.7 kg (14 lb)	
Electrical	115 VAC 50/60 Hz 100 W	230 VAC 50/60 Hz 100 W (CE)

Heating Block Modules for Minifridge II

These precision -machined solid aluminum blocks are anodized to resist corrosion and are available in many sizes. Check with Boekel customer service at 800-336-6929 for more details.

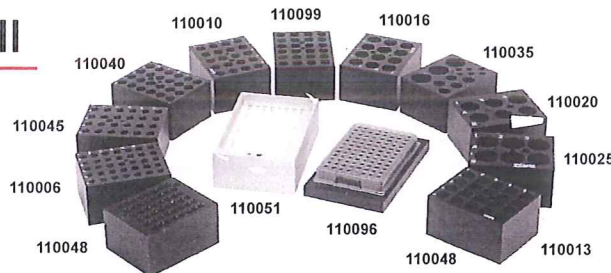

Test Tube Block Modules

	Overall Dimensions (Width x Length x Height)	Shipping Weight	Capacity
110006	7.6 cm x 9.5 cm x 5.1 cm (3 in x 3.75 in x 2 in)	1.0 kg (2.25 lb)	35 - 6 mm tubes
110010	7.6 cm x 9.5 cm x 5.1 cm (3 in x 3.75 in x 2 in)	1.0 kg (2.25 lb)	20 - 10 mm tubes
110013	7.6 cm x 9.5 cm x 5.1 cm (3 in x 3.75 in x 2 in)	1.0 kg (2.25 lb)	20 - 13 mm tubes
110016	7.6 cm x 9.5 cm x 5.1 cm (3 in x 3.75 in x 2 in)	1.0 kg (2.25 lb)	12 - 16 mm tubes
110020	7.6 cm x 9.5 cm x 5.1 cm (3 in x 3.75 in x 2 in)	1.0 kg (2.25 lb)	6 - 20 mm tubes

	Overall Dimensions (Width x Length x Height)	Shipping Weight	Capacity
110025	7.6 cm x 9.5 cm x 5.1 cm (3 in x 3.75 in x 2 in)	1.0 kg (2.25 lb)	6 - 25 mm tubes
110035	7.6 cm x 9.5 cm x 5.1 cm (3 in x 3.75 in x 2 in)	1.0 kg (2.25 lb)	3 - 25 mm tubes 5 - 13 mm tubes 6 - 6 mm tubes
110040	7.6 cm x 9.5 cm x 5.1 cm (3 in x 3.75 in x 2 in)	1.0 kg (2.25 lb)	24 - 1.5 mL tubes
110045	7.6 cm x 9.5 cm x 5.1 cm (3 in x 3.75 in x 2 in)	1.0 kg (2.25 lb)	24 - 0.5 mL tubes
110048	7.6 cm x 9.5 cm x 5.1 cm (3 in x 3.75 in x 2 in)	1.0 kg (2.25 lb)	48 - 0.2 mL tubes

Miscellaneous Block Modules

	110051	110096	110099
Overall Dimensions (Width x Length x Height)	9.5 cm x 14.3 cm x 4.4 cm (3.75 in x 5.25 in x 1.75 in)	9.6 cm x 15.3 cm x 2.5 cm (3.75 in x 6 in x 1 in)	7.6 cm x 9.5 cm x 5.1 cm (3 in x 3.75 in x 2 in)
Shipping Weight	1.4 kg (3 lb)	1.4 kg (3 lb)	0.9 kg (2 lb)
Capacity	1 - 96 well microplate	1 - 96 well 0.2 mL microplate; 0.2 mL strips or 0.2 mL tubes	24 - 1.5 mL "Dolphin" tubes

NOTE: Blocks can also be used in all Boekel Digital and Analog Dry Baths. For more information contact Boekel.



855 Pennsylvania Boulevard • Feasterville, PA 19053 USA
 800-336-6929 • Phone: 215-396-8200 • Fax: 215-396-8264
 E-mail: boekel-info@boekelsci.com • Web site: www.boekelsci.com